

Calculation of Effective Target Width and Its Effects on Pointing Tasks

著者	KONG Jing, REN Xiangshi
journal or publication title	情報処理学会論文誌 = Transactions of Information Processing Society of Japan
volume	47
number	5
page range	1570-1572
year	2006-05-15
URL	http://hdl.handle.net/10173/330

Technical Note

Calculation of Effective Target Width and Its Effects on Pointing Tasks

JING KONG^{†,††} and XIANGSHI REN[†]

Using effective target width (W_e) in Fitts' law has been widely used for evaluating one directional pointing tasks. However, concrete methods of calculating W_e have not been officially unified. This paper concentrates on resolving this problem. A specially designed and controlled experiment is described. The results reveal that the method of mapping all the abscissa data into one unified relative coordinate system to do calculation is better for modeling human computer interfaces than dividing data into two groups according to corresponding target sides and mapping them into two separate coordinate systems.

1. Introduction

Fitts' law³⁾ is a well known model for evaluating one directional pointing tasks in human-computer interactions (HCIs). The relationship between movement time (MT) and the index of difficulty (ID_e) described in Eq. (1) is a widely used form to model Fitts' law^{1),6),7)}.

$$MT = a + bID_e \quad (1)$$

$$ID_e = \log_2 \left(\frac{A}{W_e} + 1 \right) \quad (2)$$

A is the amplitude between the centers of two rectangular targets, and W_e is called the effective target width, which indicates the range of actual input hits around the target based on participants' behaviors. The Fitts' law model expressed by Eq. (1) has been accepted by ISO standards 9241-9⁴⁾.

Although the Fitts' law model has been used widely in HCI and advocated by many researchers⁶⁾, it is still under suspicion¹⁰⁾. One problem is that the calculation of W_e has not been unified.

In Eq. (2), $W_e = 4.133SD$. SD is the standard deviation for the distribution of hits. Some researchers, such as Douglas, Kirkpatrick, and Mackenzie²⁾, have used one unified coordinate system to calculate the average x-coordinates to obtain SD . We have called this method the Combined-Coordinate-system (CC) in this paper. Some researchers have used two sets of coordinate systems to calculate the average x-coordinates to obtain SD , as Isokoski and Raisamo did in their study⁵⁾. In this way the average x-coordinates need to be calculated separately for a left or right coordinate system.

This method is referred to as the Separate-Coordinate-system (SC) in this paper.

However, there have been no comparisons of concrete methods to calculate W_e to date even in ISO standards 9241-9⁴⁾. Moreover, no research has been reported on preferable methods of calculating W_e for application to the Fitts' law model, either. We therefore compared two methods to see which was better for calculating W_e . This knowledge should be of great help for further applications of Fitts' law to the HCI field.

2. Experiment

To analyze and compare the two methods of calculating W_e accurately, we developed an experiment that could produce a set of time measurements when participants fully complied with given target widths to an extent that was almost ideal (W_e matches W within 7% margin).

2.1 Subjects

Ten volunteers, five males and five females (average 28.8 years old), participated in this experiment.

2.2 Apparatus

A desktop PC with a color LCD monitor produced by Eizo FlexScan L567 (338 mm (W) × 270 mm (H)) was used in this experiment. The resolution was 1,024 × 768 pixels. One pixel equaled 0.264 mm. The input device was the Microsoft Wheel Mouse Optical 1.1 A.

2.3 Design

Similar to Fitts' paradigm experiment³⁾, our participants reciprocally pointed with a mouse to a pair of vertical strips with a fixed distance A of 400 pixels. W (appointed target width) was set at 10, 14, 20, 28, and 40 pixels. If the region outside the target was tapped, the task would not be abandoned. Instead an auditory

† Kochi University of Technology

†† Nagoya University

signal would be played as a warning signal. The start position for the cursor was the center of the screen.

We used a method of enforcing target width inspired by Zhai, et al.'s verbal feedback^{8),9)} to obtain data when subjects fully complied with the target width. By observing the ideal input hits distribution, we could see whether the Fitts' law model could accurately model the pointing task by using either method to calculate W_e .

If participants during the experiment took too many risks and created a large SD and hence a big W_e , the program would remind them to slow down. In contrast, if W_e was very small, the program would remind them to hurry up. If their current endpoints dispersion corresponded to an ideal ($W = W_e$ within 7% margin)⁹⁾, the participants could maintain their current pace.

2.4 Procedure

We used the following variations on the two methods to calculate SD and control the programs for CC and SC.

The program for the CC calculated the SD based on one coordinate system (see Fig. 1 (b)). This meant that the standard deviation (SD) could be calculated by:

$$SD = \sqrt{\frac{\sum_{i=1}^n (x_i - \bar{x})^2}{n - 1}} \quad (3)$$

In Eq.(3), x_i was the i th of the participant's selection point's x-coordinates (they were mapped into one unified coordinate system), \bar{x} was the mean of x-coordinates, and n was the number of trials.

The situation for SC was more complex. The program calculated SD based on two sets of coordinate systems (see Fig.1(c)). The steps were: first, compute the average for the left and right x-coordinates for the past 14 trials (or less than this before the 15th trial). Second, obtain the $x_i - x_{average}$, ($i = 1, 2 \dots n, n \leq 14$). Here, x_i is the i th hit's x-coordinate and $x_{average}$ represents the average values for x_i . Then, there should be 14 numbers for $x_i - x_{average}$ ^{*}. The next step was to obtain the SD for the 14 ($x_i - x_{average}$)s, if $x'_i = x_i - x_{average}$, then

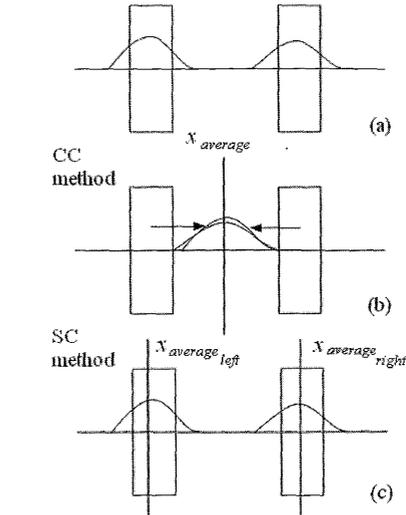


Fig. 1 Two methods for effectively calculating target width. ((a) indicates distribution of hits for left and right targets. (b) indicates using CC to map all dots into one combined coordinate system to calculate average SD and W_e . (c) indicates using SC to calculate average SD and W_e with two separate coordinate systems.)

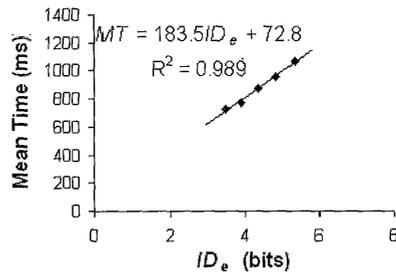


Fig. 2 Regression between mean time and ID_e using CC.

$$SD' = \sqrt{\frac{\sum_{i=1}^n (x'_i - \bar{x}')^2}{n - 1}} \quad (4)$$

2.5 Results and Discussion

We collected data and made the Fitts' law regression lines in Figs. 2 and 3.

The R^2 in the regression line for CC is nearly 1 (0.989), which means using this method makes the regression in Fitts' law ideal and strong. The regression in Fitts' law line in Fig. 3 is still large (0.909), but not as great as indicated by Fig. 2. This means that SC is not as good as CC.

Since the system in the experiment gave immediate responses to subjects in all trials, performance was almost ideally controlled. Therefore, the regression between mean time and ID_e

^{*} One notable point here is that for the left and right side hits, the values of $x_{average}$ were different. Therefore, $x_i - x_{average}$ should be written as $x_{i,left} - x_{average,left}$ for left side hits, and $x_i - x_{average}$ should be written as $x_{i,right} - x_{average,right}$ for right side hits. Here, we used $x_i - x_{average}$ for convenience.

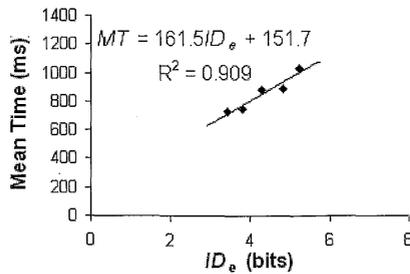


Fig. 3 Regression between mean time and ID_e using SC.

should be rather strong. From this point of view, however, the regression in Fitts' law line in Fig. 3 (related to SC) is not strong enough.

3. Conclusion

We studied and compared two methods of calculating W_e . The results revealed that CC was better than SC, i.e., it was a better way to map all the abscissa data into one unified relative coordinate system to do calculation, and did not divide data into two separate groups according to corresponding target sides.

Moreover, calculation with CC is also much easier and more convenient than with SC.

The data presented in this paper enable a detailed and reliable comparison of the two methods for calculating W_e based on knowledge about input hits with different target sizes. This study should help to develop a standard for application to effective target width.

References

- 1) Crossman, E.R.F.W.: The information capacity of the human motor system in pursuit tracking, *Quarterly Journal of Experimental Psychology*, Vol.12, pp.1-16 (1960).
- 2) Douglas, S.A., Kirkpatrick, A.E. and Mackenzie, I.S.: Testing pointing device performance and user assessment with the ISO 9241 Part 9 Standard, *Human Factors in Computing Systems, Proc. CHI'99*, pp.215-222 (1999).
- 3) Fitts, P.M.: The information capacity of the human motor system in controlling the amplitude of movement, *Journal of Experimental Psychology*, Vol.47, pp.381-391 (1954).
- 4) ISO 9241-9: Ergonomic design for office work with visual display terminals (VDTs) — Part 9: Requirements for non-keyboard input devices, International Standardization Organization (2000).
- 5) Isokoski, P. and Raisamo, R.: Speed-accuracy measures in a population of six mice, *Proc. APCHI2002: 5th Asia Pacific Conference*

on *Computer Human Interaction*, pp.765-777 (2002).

- 6) Mackenzie, I.S.: Fitts' law as a research and design tool in human-computer interaction, *Human-Computer Interaction*, Vol.7, pp.91-139 (1992).
- 7) Welford, A.T.: *Fundamentals of skill*, London: Methuen, pp.147-148 (1968).
- 8) Zhai, S., Conversy, S., Beaudouin-Lafon, M. and Guiard, Y.: Human on-line response to target expansion, *Human Factors in Computing Systems, Proc. CHI'2003*, pp.177-184 (2003).
- 9) Zhai, S., Kong, J. and Ren, X.: Speed-accuracy trade-off in Fitts' law tasks on the equivalency of actual and nominal pointing precision, *Int. Journal of Human Computer Studies*, Vol.61, pp.823-856 (2004).
- 10) Zhai, S.: Characterizing computer input with Fitts' law parameters — the information and non-information aspects of pointing, *International Journal of Human-Computer Studies*, Vol.61, pp.791-809 (2004).

(Received November 17, 2005)

(Accepted February 1, 2006)

(Online version of this article can be found in the IPSJ Digital Courier, Vol.2, pp.235-237.)



Jing Kong received her Bachelor's degree in 1998 and her Master's degree in 2003 both from Harbin Engineering University in China. She received her Ph.D. in March, 2006 from the Department of Information

Systems Engineering at Kochi University of Technology in Japan. Her research interests include human computer interaction modeling. She is a student member of ACM.



Xiangshi Ren is an associate professor in the Department of Information Systems Engineering at Kochi University of Technology. He received his B.E. in 1991, M.E. in 1993 and Ph.D. in 1996 from Tokyo Denki Univer-

sity in Japan. His research interests include all aspects of human-computer interaction, in particular, multimodal interactions, and user interface design and evaluation. He is a member of the ACM, and the IEEE Computer Society.